

1300 Series 1306C-E87TAG6 Diesel Engine – Electropak

239 kWm 1500 rev/min

The Perkins 1300 Series family of Electropak engines has become renowned throughout the power generation industry for the engines' superior performance and reliability.

The 1306C-E87TAG6 engine is a turbocharged and air-to-air charge cooled unit, featuring hydraulically-actuated electronically controlled unit injectors (HEUI) with 'full authority' electronic engine management providing reliable, quiet, economic operation supported by the quick starting, fast response and close control demanded by the electrical power generation market.

High performance productive power

- Hydraulically actuated Electronically controlled Unit Injectors – high-pressure fuel injection gives consistent, reliable high performance
- Constant electronic engine management and monitoring enable precise fuel metering and injection timing to ensure reliable low temperature starting, superb economy with performance and very close governing


Quiet, clean power

- A rigid structure minimises noise transmission and helically cut gears provide quiet power transfer to auxiliaries
- Forced induction and electronic fuel injection control combine to reduce combustion noise while electronically optimised fuel/air mixing ensures complete combustion resulting in virtually smoke free operation with emissions capability matching current and future emissions legislation

Durable power

- A fully balanced induction-hardened steel crankshaft gives smooth performance with minimised bearing loads

- Oil cooled pistons with keystone top and second rings give longer life while positive rotational valves and roller cam followers reduce wear on valve seats, tappets and cam lobes

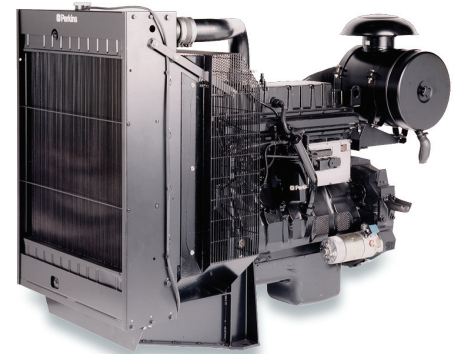

Reliable power

- Cylinder head coolant is directed to valve bridges and injectors and lubricating oil is cooled in a high efficiency oil cooler, both features enhancing engine reliability
- Electronic safety shutdown option protects the engine while event and fault warning codes protect operations

Easy maintenance

- Electronic diagnostics help to keep the engine at its productive best while enabling the operator to plan maintenance. Oil and filter changes at 450 hours reduce down time
- All engines are supported by the Perkins worldwide network of distributors and dealers

Certified against the requirements of EU2007 (EU97/68/EC Stage II) legislation for non-road mobile machinery, powered by constant speed engines

| Engine Speed (rev/min) | Type of Operation | Typical Generator Output (Net) | | Engine Power | | | |
|-----------------------------|-------------------|--------------------------------|-----|--------------|-----|-----|-----|
| | | | | Gross | | Net | |
| | | kVA | kWe | kWm | bhp | kWm | bhp |
| 1500 Rating Code M433 | Baseload Power | 228 | 182 | 204 | 273 | 198 | 265 |
| | Prime Power | 250 | 200 | 224 | 300 | 217 | 291 |
| | Standby (maximum) | 275 | 220 | 246 | 330 | 239 | 320 |

1500 rev/min switchable ratings are offered for stand-alone non-load sharing gen set applications. Rating code M165 applies. The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS5514/1, DIN 6271. Derating may be required for conditions outside these; consult Perkins Engines Company Limited.

Generator powers are typical and are based on an alternator efficiency of 92% and a power factor of 0.8. Performance tolerance is $\pm 5\%$. Fuel specification: BS 2869: Part 2 1998 Class A2 or ASTM D975 D2. Lubricating oil: 15W40 to ACEA E3 or API CG4.

Rating Definitions

Baseload Power: Power available for continuous full load operation. Overload of 10% permitted for 1 hour in every 12 hours' operation. **Prime Power:** Power available at variable load with a load factor not exceeding 80% of the prime power rating. Overload of 10% is permitted for 1 hour in every 12 hours' operation. **Standby (maximum):** Power available at variable load in the event of a main power network failure up to a maximum of 500 hours per year of which up to 300 hours may be continuous. No overload is permitted.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently. Publication No. PN1616/09/12 Produced in England ©2012 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1300 Series 1306C-E87TAG6 Diesel Engine – Electropak

239 kWm 1500 rev/min

Standard Electropak specification

Air inlet

- Mounted air filter and turbocharger

Fuel system

- Hydraulically actuated electronically controlled unit fuel injectors with full authority electronic control
- Electronic governing to ISO 3046-4 with stand-alone isochronous or load-sharing capabilities
- Spin-on fuel filter with pre-filter and hand primer pump

Lubrication system

- Wet rear well steel sump with filler and dipstick
- Full flow spin-on filters
- Tube-type oil cooler thermostatically controlled

Cooling system

- Thermostatically controlled with belt driven circulating pump and 28 inch belt-driven fan
- Radiator mounted with all guards and pipes
- Air/air charge cooler incorporated in radiator
- Coolant filter/conditioner

Electrical equipment

- 24V starter motor and 24V 45 amp alternator with DC output
- Electronic Control Module mounted on engine with wiring looms and sensors
- 3 level engine protection system

Flywheel and housing


- High inertia flywheel to SAE 3 J620 Size 1 1/2
- Cast iron SAE 2 flywheel housing

Mountings

- Front engine mounting bracket

Optional equipment

- 12V starter and alternator
- 12V ECM
- Sensor positions for:
 - oil pressure
 - oil temperature
 - coolant temperature
- SAE 1 flywheel housing and flywheel
- Turbocharger exhaust outlet
- User's handbook and parts manual
- Workshop manual

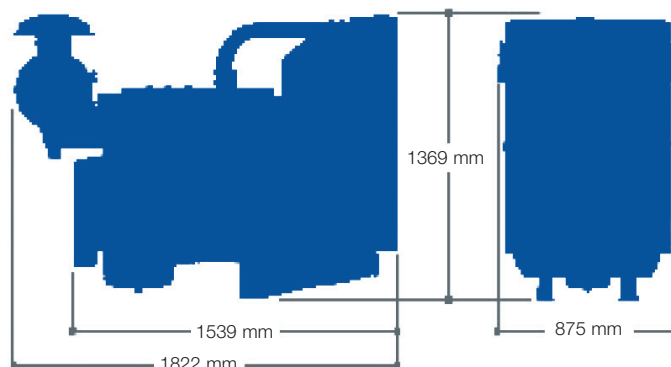

| Fuel Consumption | | |
|--------------------|--------------|------|
| Engine Speed | 1500 rev/min | |
| | g/kWh | l/hr |
| Standby | 172 | 49.7 |
| Prime Power | 188 | 45.0 |
| 75% of Prime Power | 200 | 36.0 |
| 50% of Prime Power | 200 | 24.0 |

General data

| | |
|--|---------------------------------------|
| Number of cylinders | 6 |
| Cylinder arrangement | Vertical in-line |
| Cycle..... | 4 stroke |
| Induction system | Turbocharged, air-to-air chargecooled |
| Combustion system..... | Direct injection |
| Cooling system..... | Water-cooled |
| Bore and stroke..... | 116.6 mm x 135.9 mm |
| Displacement | 8.7 litres |
| Compression ratio | 16.9:1 |
| Direction of rotation | Anti-clockwise, viewed on flywheel |
| Total lubrication system capacity..... | 26.4 litres |
| Total coolant capacity | 37.2 litres |
| Dimensions – Length | 1822 mm |
| Width | 875 mm |
| Height | 1369 mm |
| Dry weight (engine) | 895 kg |

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.
Publication No. PN1616/09/12 Produced in England
©2012 Perkins Engines Company Limited

Perkins Engines Company Limited

Peterborough PE1 5FQ
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240

www.perkins.com



THE HEART OF EVERY GREAT MACHINE